



www.armstrong.fr/plafonds
www.armstrong-plafonds.be
www.armstrong.nl/plafonds

Armstrong®

ALPINA OP



Recycled Content

Light Reflectance

Concentration

ALPINA OP

	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
600 x 600 x 15 mm	3807 M	3810 M	3812 M
675 x 675 x 15 mm	3808 M	3811 M	3813 M
600 x 1200 x 15 mm	3809 M		


Length maximum 1200 mm x 600 mm



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.90	0.85	0.40	0.80	0.90	0.85	1.00	1.00	α_p

Sound Absorption Class = A

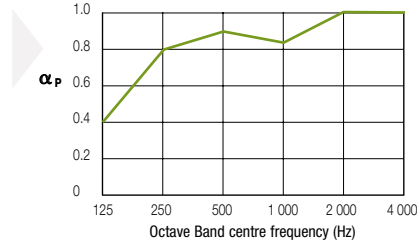

EN ISO 10848-2
& EN ISO 717-1

Dnfw
25 dB



EN ISO 140-3
& EN ISO 717-1

Rw
12 dB



EN 13501-1

EEA Euroclass A2-s1,d0



EN 12667
& ISO 8301

$\lambda = 0.036$ W/m K



95% RH



ISO 14644-1


ISO 5



15 YEAR
guarantee



2.4 kg/m²



- Pour de plus amples informations merci de contacter notre Service Information Plafonds.

- Voor meer informatie kunt u contact opnemen met Market Service Center.

www.armstrong.fr/plafonds
www.armstrong-plafonds.be
www.armstrong.nl/plafonds

