



SAHARA dB









Recycled Content

Light Reflectance

Confidentiality

SAHARA dB

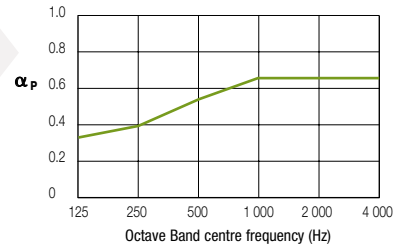
	BOARD	TEGULAR	MICROLOOK BE
			
	Prelude XL ² /TLX 24 mm Prelude Sixty ²	Prelude XL ² /TLX 24 mm Prelude Sixty ²	Prelude XL ² /TL 15 mm Silhouette XL ² 15 mm Interlude XL ² 15 mm
			
600 x 600 x 19 mm	2990 M	2992 M	2994 M



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.60	0.55	0.35	0.40	0.55	0.65	0.65	0.65	α_p

Sound Absorption Class = C



EN ISO 10848-2 & EN ISO 717-1

Dnfw
39 dB



EN ISO 140-3 & EN ISO 717-1

Rw
20 dB



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



EN 12667 & ISO 8301

$\lambda = 0.067 \text{ W/m K}$



95 % RH

LIFE TIME guarantee



$\approx 7.8 \text{ kg/m}^2$



- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

www.armstrong.eu

Armstrong